


Klingerit TG NA 100



Klingerit TG NA 100	
Boja	crvena
Dimenzija tabli (mm)	1500×1500, 1500X2000
Debljina tabli (mm)	0.3, 0.5, 1, 1.5, 2, 2.5, 3, 4, 5
Max. temperatura (°C)	210 °C (kratkotrajno) 180 °C (neprekidno) 150 °C (para)
Max. pritisak (bar)	40
Standard DIN 28091-2	FA-M21-0
Standardu ASTM F 104	F712 120-M4
Gustina (g/cm³)	1.7
Sastav	organska vlakana i NBR

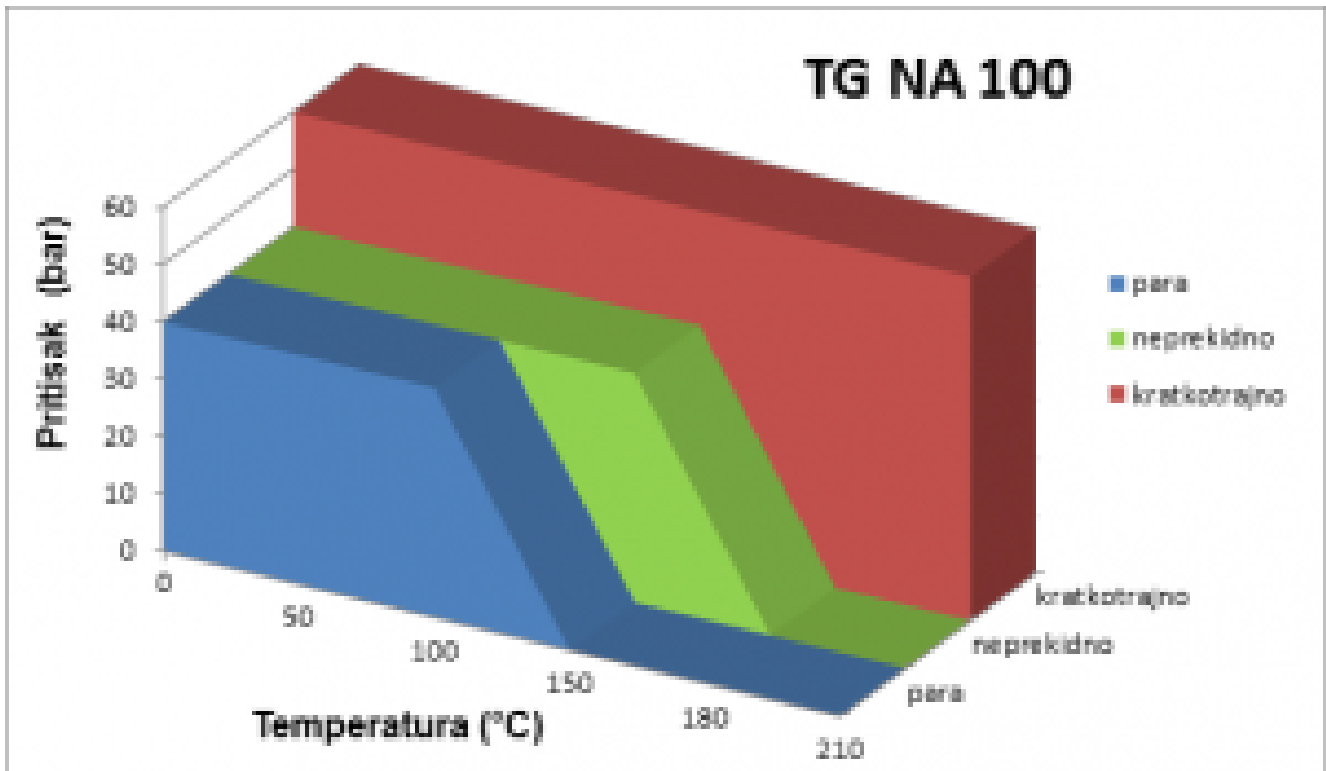

Primena: široka primena u svim granama industrije gde su slabiji parametri.